




HOT RUNNER HEATER

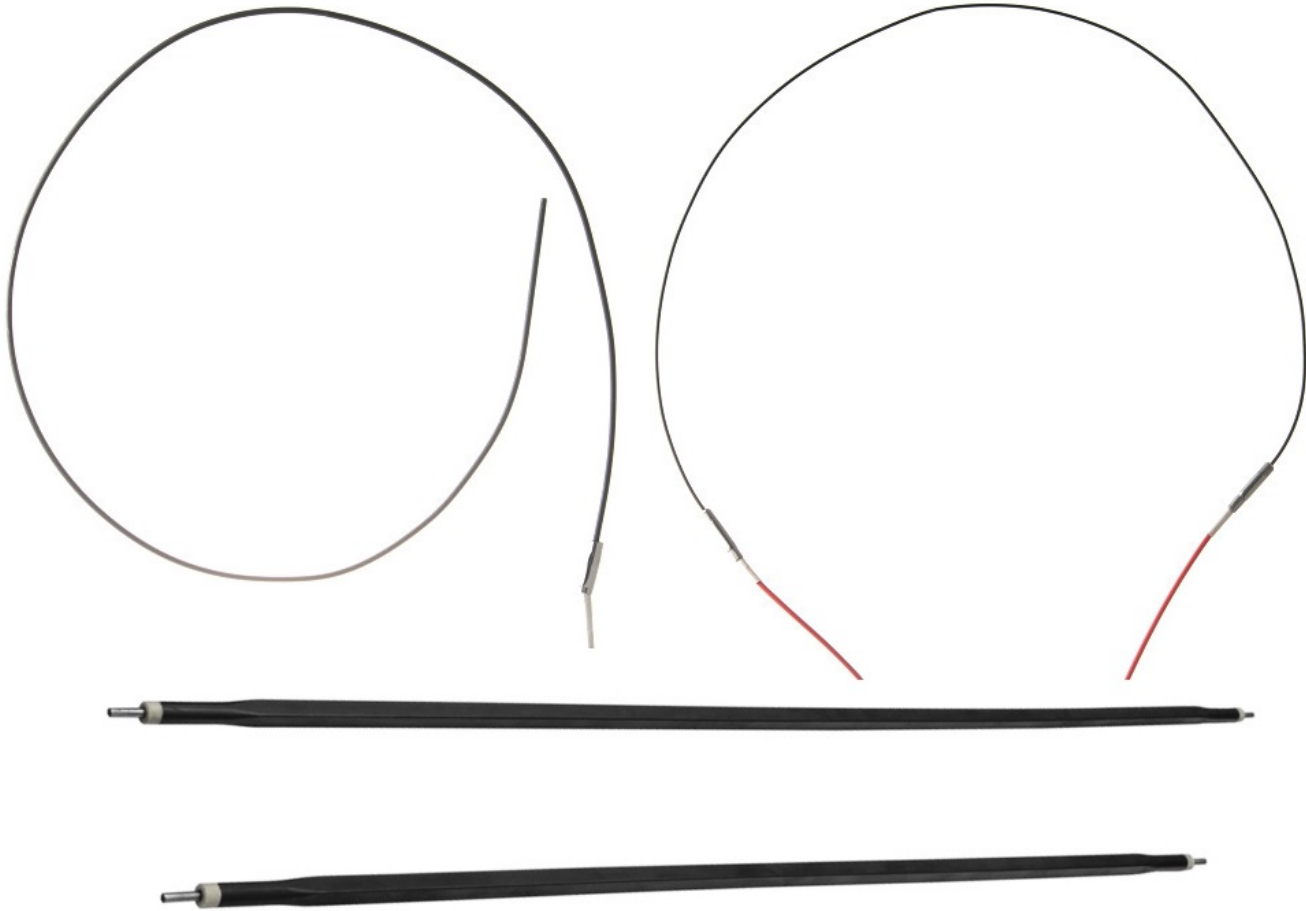

HOT RUNNER HEATER

Features

cold end (mm)

- Types : tubular heater ` coil heater ` 6*6/7*7 square heater `

Application examples

- Widely used in heavy oil, asphalt, boiled oil and other fuel oil preheating or reheating processes, also used in rubber and plastic manufacturing industry
- etc



Available diameter	Total length(mm)	Heating length (mm)	cold end (mm)	voltage (V)	waltage (W)	recommended waltage range (W)
ψ1.8(double ends)	620	450	60/60	220	250	200 ~ 400
	720	550	60/60	220	300	250 ~ 500
	820	650	60/60	220	350	300 ~ 600
	920	750	60/60	220	400	300 ~ 650
	1020	850	60/60	220	450	350 ~ 700
	1120	950	60/60	220	500	400 ~ 750
	1220	1050	60/60	220	550	450 ~ 750
ψ3.3(single ends)	495	400	75	220	350	300 ~ 450
	645	550	75	220	420	350 ~ 500
	795	700	75	220	530	400 ~ 600
	940	850	75	220	650	500 ~ 700
	1095	1000	75	220	750	550 ~ 800