

 [Click Here for Quote!](#)

FENWAL CONTROLS

...the name OEMs have trusted for over 80 years.



**THERMOSWITCH® Temperature Controls • FENWAL CONTROLS Bi-Metal Thermostats & Hi-Limits
DETECT-A-FIRE® Fire & Overheat Detectors • FENWAL CONTROLS Gas Ignition Controls**

Toll free: ph 800-925-4328 Local: ph 262-253-4800 Email: info@gordonhatch.com

 [Click Here for Quote!](#)

Fenwal Controls was founded in 1935, and versions of our original THERMOSWITCH® control are still in production today. With over 80 years of expertise, we offer a broad range of gas ignition and temperature controls for applications such as HVAC, commercial cooking, industrial fire protection, medical and agriculture. Trust Fenwal Controls to provide reliable and cost-effective products custom configured to your needs.



Kidde-Fenwal Inc., Headquarters - Ashland, Massachusetts USA

Gas Ignition Controls

Fenwal Controls pioneered automatic gas burner technology and today offers a complete line of globally-approved gas ignition controls. Direct spark, hot surface and intermittent pilot configurations are available in a wide range of input voltages. Our microprocessor-based controls provide precise, repeatable and safe operation for all types of gas-fired equipment.

Temperature Controllers

Fenwal Controls' long tradition started with the Fenwal Controls THERMOSWITCH® controller, and has expanded to include both temperature controllers and bimetal thermostats for control and limiting applications. We specialize in high-precision, custom-configured products for air-sensing and immersion-type applications.

Fire & Overheat Detection

Fenwal Controls is a world leader in mechanical heat detectors. We offer rate-compensated heat detectors suitable for initiating an alarm or actuating a fire suppression system. Featuring a hermetically sealed, tamper-proof mechanism, the Fenwal Controls DETECT-A-FIRE® heat detector provides reliable performance even under harsh environmental conditions.

Global Approvals

We offer a complete line of Globally Approved Gas Ignition and Temperature Sensing Controls conforming to the following standards where applicable:





Gas Ignition Controls

12 VDC/24DC	4
24 VAC	5
120 VAC	6
Accessories	6
Modulating Combustion and System Control ...	7



Bimetal Thermostats, Hi-Limits, Temperature Limiting Switches

Probe Styles	8
Surface Mount Styles	8



THERMOSWITCH® Temperature Controller

Surface Mount Styles	9
Probe Styles	9



DETECT-A-FIRE® Fire & Overheat Detection

Horizontal & Vertical Mounting Styles	10
---	----

Resources

Website	11
Sales and support	11


GAS IGNITION CONTROLS — 12 VDC, 24 VAC and 120 VAC

Advanced, microprocessor-based designs safely operate the gas valve and the ignition source while continually supervising the proper operation of the gas burner.

Features

Ignition types: Direct Spark (DSI), Hot Surface (HSI), Intermittent Pilot (IP)

- DETECT-A-FLAME® technology for exceptional flame sensitivity
- Configurable timings to a wide range of gas-fired appliances & requirements.
- Optional Combustion Blower Relay with Airflow Monitoring
- On-board Diagnostic LED
- Remote or Local Flame Sense
- Flame Current Test Pins
- Optional one hour Automatic Reset
- EN298 Approved Models meet RoHS2

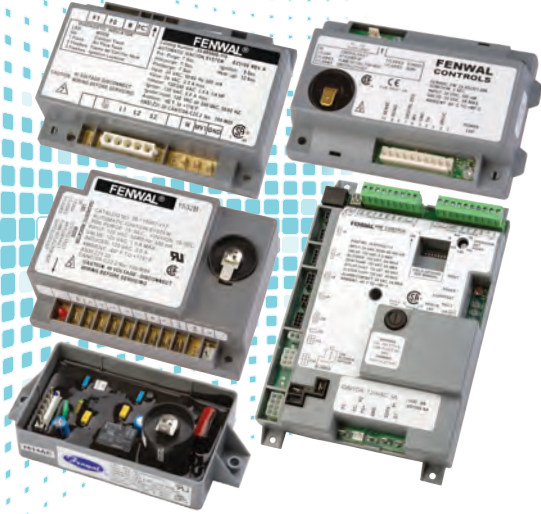





35-40 and 35-50 Series for 12VDC/24DC

Ignition types: Direct Spark (DSI) and Hot Surface (HSI)

Typical Applications

- Mobile equipment such as RV water heaters and furnaces, construction heaters, fuel cells
- Commercial cooking, furnaces, gas appliances using universal power



SERIES NUMBER	TYPE	DESCRIPTION	ENCLOSURE	DIMENSIONS	APPROVALS
Without Combustion Blower Relay					
35-40	DSI	<ul style="list-style-type: none"> • SMT with Pin Connector • Non-volatile lockout with manual reset 	Board Only Cover & Base	4.70" x 3.10" x 2.00" 5.32" x 3.29" x 2.00"	
35-52	DSI	<ul style="list-style-type: none"> • Edge connector • No LED Diagnostics 	Board Only	4.00" x 2.30" x 1.50"	
With Combustion Blower Relay					
35-535	DSI	<ul style="list-style-type: none"> • Edge or Pin connector • Airflow switch monitoring 	Board Only	4.25" x 3.25" x 1.75"	
			Cover & Base	4.42" x 3.42" x 1.94"	
35-533	DSI	<ul style="list-style-type: none"> • Small footprint • Advanced technology 	Board Only	4.25" x 2.60" x 1.50"	













35-60 Series for 24VAC

Ignition types: Direct Spark (DSI), Intermittent Pilot (IP) and Hot Surface (HSI)

Typical Applications

- Boilers, Furnaces, Water Heaters, Unit Heaters, Pool Heaters, Commercial Cooking Equipment

SERIES NUMBER	TYPE	DESCRIPTION	ENCLOSURE	DIMENSIONS	APPROVALS
Without Combustion Blower Relay — QC Connections (unless noted)					
35-60	DSI	<ul style="list-style-type: none"> Full-featured control suitable for any 24VAC DSI application EN298 approved models available 	Cover & Base	5.69" x 3.97" x 2.30"	
			Board Only	5.50" x 3.75" x 1.98"	
35-608	DSI	<ul style="list-style-type: none"> QC terminals or Pin Connector Non-volatile lockout with manual reset 5A gas valve relay 	Board Only	5.00" x 3.73" x 2.50"	
			Cover & Base	5.20" x 3.95" x 2.50"	
35-602 Mini	DSI	<ul style="list-style-type: none"> Small footprint Model with multi-pin connector No LED diagnostics 	Board Only	4.00" x 2.30" x 2.33"	
			Potted Module	5.37" x 2.53" x 2.35"	
35-62	DSI	<ul style="list-style-type: none"> Dual Point Ignition model with dual flame sensing Ideal for many Commercial Cooking applications 	Cover & Base	5.69" x 5.31" x 2.30"	
			Board Only	5.5" x 5.12" x 1.84"	
35-63	IP	<ul style="list-style-type: none"> Up to 90 seconds TFI for pilot applications Mounts directly on 4" junction box 	Cover & Base	5.69" x 3.97" x 2.30"	
			Board Only	5.50" x 3.75" x 1.98"	
35-63J	IP	<ul style="list-style-type: none"> Johnson Controls® form/fit/function replacement All 1/4" QC with Rajah HV terminal 	Cover & Base	4.92" x 3.32" x 2.80"	
			Board Only	4.70" x 3.10" x 2.80"	
35-65	HSI	<ul style="list-style-type: none"> Remote or Local Flame sensing in same unit CSA, EN298 and FM Approved models available Optional dual 120/240 VAC model available 	Cover & Base	5.69" x 3.97" x 1.62"	
			Board Only	5.50" x 3.75" x 1.85"	
With Combustion Blower Relay — QC Connections					
35-61	DSI	<ul style="list-style-type: none"> Airflow Switch monitoring and diagnostics EN298 approved models available 	Cover & Base	5.69" x 3.97" x 2.30"	
			Board Only	5.50" x 3.75" x 1.98"	
35-66	HSI	<ul style="list-style-type: none"> Airflow Switch monitoring Optional Dual Speed Blower Optional dual 120/240 VAC model available 	Cover & Base	5.67" x 3.97" x 1.62"	
			Board Only	5.50" x 3.75" x 1.85"	
35-67	HSI	<ul style="list-style-type: none"> Proven Ignition applicable for 400K to 2.5 million BTU Airflow Switch and Low-voltage monitoring Manual or Automatic reset with CSD-1 versions available 	Cover & Base	5.69" x 5.31" x 1.81"	




35-80 Series for 24VAC

Ignition types: Direct Spark (DSI)

Typical Applications

- Space Heaters; Rooftop HVAC Units, Furnaces

SERIES NUMBER	TYPE	DESCRIPTION	ENCLOSURE	DIMENSIONS	APPROVALS
35-80	DSI	<ul style="list-style-type: none"> Integrated Indoor and combustion blower functions with airflow and limit switch monitoring Heat/Cool or Heat Only models 	Board Only	5.75" x 4.50" x 1.80"	









35-70 Series for 120 VAC

Ignition types: Direct Spark (DSI), Intermittent Pilot (IP) and Hot Surface (HSI)




Typical Applications

- Radiant and Infrared Heaters, Construction Heaters, Agricultural Equipment, Gas Lighting

SERIES NUMBER	TYPE	DESCRIPTION	ENCLOSURE	DIMENSIONS	APPROVALS
Without Combustion Blower Relay					
35-70	DSI	<ul style="list-style-type: none"> • Multi-pin or quick-connect versions • Option for 24VAC thermostat signal 	Cover & Base	5.11" x 3.55" x 2.00"	
			Board Only	4.92" x 3.37" x 1.99"	
			Potted Module	6.16" x 3.81" x 1.80"	
35-703	IP	<ul style="list-style-type: none"> • Intermittent Pilot operation • Multi-pin or quick-connect versions 	Cover & Base	5.11" x 3.55" x 2.00"	
			Board Only	4.92" x 3.37" x 1.99"	
			Potted Module	6.16" x 3.81" x 1.80"	
35-72	DSI	<ul style="list-style-type: none"> • Compact footprint • No LED diagnostics • Multi-pin connector 	Board Only	4.00" x 2.30" x 2.33"	
			Potted Module	5.37" x 2.53" x 2.35"	
35-72P	IP	<ul style="list-style-type: none"> • Ideal replacement for Mercury Flame switches • Pilot Re-lighter applications 	Board Only	4.00" x 2.30" x 2.33"	
			Potted Module	5.37" x 2.53" x 2.35"	
35-75	HSI	<ul style="list-style-type: none"> • Compact footprint • Multi-pin connector 	Board Only	4.00" x 2.30" x 1.58"	
			Potted Module	5.37" x 2.53" x 1.50"	
With Combustion Blower Relay					
35-71	DSI	<ul style="list-style-type: none"> • Airflow Switch monitoring and diagnostics • Multi-pin or quick-connect versions 	Cover & Base	5.11" x 3.55" x 2.00"	
			Board Only	4.92" x 3.37" x 1.99"	
			Potted Module	6.16" x 3.81" x 1.80"	


Gas Ignition Control Accessories

- A wide variety of electrodes, flame sense rods and cable assemblies custom configured to OEM applications

	DESCRIPTION	SPECIFICATIONS	OPTIONS	APPROVALS
	<ul style="list-style-type: none"> • 05 and 22 Series • Spark Electrodes • Flame Sensors 	<ul style="list-style-type: none"> • High temperature electrode materials (1,400°C) • Alumina Ceramic Insulators 	<ul style="list-style-type: none"> • Bracket Mounting Styles • Cable Extensions • Quick Connects • Rajah Connectors 	
	<ul style="list-style-type: none"> • 05 Series • Cable Assemblies 	<ul style="list-style-type: none"> • High Voltage Cables • Suppression Cables • Multi-pin Harnesses 	<ul style="list-style-type: none"> • Boot Styles • Quick Connects • Multi-Pin Connectors • Agency Listed Components 	

MODULATING COMBUSTION AND SYSTEM CONTROL

The **FENWAL CONTROLS PIM®** Control series integrates gas burner control, modulation, temperature control, Hi-limit control and system wiring onto one platform. Suitable for HVAC, Commercial Cooking or any appliance that requires demand-driven modulation, the Fenwal Controls PIM is a flexible, scalable solution for a broad range of applications.

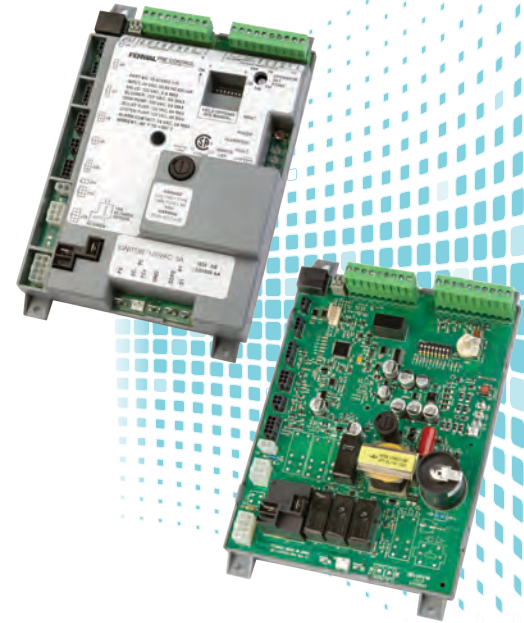

Features

- DETECT-A-FLAME® technology for exceptional flame sensitivity
- Supports all popular ignition formats
- Operating temperature control
- PWM and 4-20ma modulating outputs
- UL-353 Hi-Limit
- RS485/Modbus communications
- Seven temperature sensor inputs
- Three discrete proving inputs
- Local and remote diagnostics
- Non-volatile lockout with manual reset
- Three assignable 5A relays
- Master/Member capability
- 0-10V or 4-20ma direct drive capability
- Compatible with tekmar® BTC-II controllers



Boiler Application







Fryer Application



35-9X Series for 24VAC

Typical Applications

- Premix modulating boilers, water heating, commercial cooking

SERIES NUMBER	TYPE	DESCRIPTION	ENCLOSURE	DIMENSIONS	APPROVALS
35-91	DSI	<ul style="list-style-type: none"> • Integrated Hi-Energy Spark Output • Feature optimized versions available for commercial cooking or modulating burners 	Cover & Base	8.50" x 6.50" x 2.50"	
35-92	DSI	<ul style="list-style-type: none"> • External Spark Transformer model 	Cover & Base	8.50" x 6.50" x 2.50"	
35-96	HSI	<ul style="list-style-type: none"> • Flame sensing by igniter or remote rod 	Cover & Base	8.50" x 6.50" x 2.50"	
35-97	HSI	<ul style="list-style-type: none"> • Proven Ignition 	Cover & Base	8.50" x 6.50" x 2.50"	

Bimetal Temperature Limiting Thermostats

Fixed setting devices designed specifically for temperature limiting applications.

Features

Snap Action Switching, Hermetically Sealed (Probe Style), Tamper-proof, Pre-set Temperatures, Automatic Reset, Shock and Vibration Resistant




08-80 and 08-81 — Probe style

Typical Applications

- Commercial Equipment: Cooking, Medical, Plastics Processing, Refrigeration, Boilers




TEMPERATURE RANGE	CURRENT RATING	CONTACT ACTION	APPROVALS	OPTIONS
08-81 Series 35 to 350°F (2 to +176°C)	5A Resistive @ 120/240VAC 120/240VA Pilot Duty 3A Resistive @ 30VDC	SPST contacts — opens OR closes on temperature rise		<ul style="list-style-type: none"> Mounting Threads Terminations
08-80 Series 240 to 500°F (116 to 260°C)	3A Resistive @ 120/240VAC 120/240VA Pilot Duty 3A Resistive @ 30VDC			

08-02 and 08-03 — Surface Mount Style

Typical Applications

- Commercial Equipment: Cooking, Packaging, Food Processing, Plastic Processing, Communications, Solar Heating, Refrigeration Compressors, Power Supplies




TEMPERATURE RANGE	CURRENT RATING	CONTACT ACTION	APPROVALS	OPTIONS
08-02 Series 35 to 350°F (2 to 176°C)	12A @ 240VAC	SPST contacts — opens OR closes on temperature rise		<ul style="list-style-type: none"> Mounting Brackets Terminations
08-03 Series 240 to 550°F (116 to 288°C)	10A @ 240VAC			

08-05 and 08-06 — Surface Mount Style

Typical Applications

- Boilers, Pool Heaters, Domestic Hot Water Systems, Hi-Limit and Automatic Gas Shut-off



TEMPERATURE RANGE	CURRENT RATING	CONTACT ACTION	APPROVALS	OPTIONS
08-05 Series 110 to 210°F (43 to 95°C)	1A @ 30VDC 1A Resistive @ 120 VAC	SPST contacts — opens on temperature rise		<ul style="list-style-type: none"> Mounting Brackets Mounting Threads Terminations
08-06 Series 300 to 450°F (148 to 252°C)	0.5A @ 50VDC 15A Resistive @ 120 VAC Manual Reset			

THERMOSWITCH® Controller

Slow make-break devices for immersion and flat surface temperature control applications that require close temperature control. Differential expansion between the internal struts and external shell provides fast response and close control.

Probe Style Features

Adjustable, Narrow Differential, Extreme Sensitivity, Vibration Resistant, No Power Supply Required, Brass or Stainless Steel Shell

Surface Mount Features


Fully Adjustable, Narrow Temperature Differential, Compact Size, Factory Preset Temperature Settings



17000/18000 Series — Probe Style Models, Slow Make and Break

Typical Applications

- Commercial Equipment: Cooking, Dishwashing, Medical, Packaging, Laminating, Heat Transfer Systems, Agricultural Equipment

TEMPERATURE RANGE	CURRENT RATING	CONTACT ACTION	APPROVALS	OPTIONS
Two overlapping ranges from -100°F to 600°F (-73° to 316°C)	10A @ 120VAC 5A @ 240VAC Resistive	SPST Contacts Open OR Close on temperature rise	 (up to 500°F)	<ul style="list-style-type: none"> • Various Mounting Styles • Factory Temperature Settings • Extended Wire Leads • Extended Shell Lengths

80016 Series — Thermowell for Hazardous Locations



Typical Applications

- To be used with 17000 Series THERMOSWITCH®
- Explosion-proof well assembly: Class I, Group D and Class II, Groups E, F, and G, Division 1 and 2 locations.

30000 Series — Surface Sensing Models, Slow Make and Break



Typical Applications

- Commercial Equipment: Cooking, Dental, Packaging, Laminating, Hot Stamping, Pressure Washing, Steam Cleaning, Vending Machines, Water Heaters

TEMPERATURE RANGE	CURRENT RATING	CONTACT ACTION	APPROVALS	OPTIONS
Two overlapping ranges from 50° to 600°F	10A @ 10VAC 5A @ 240VAC Resistive	SPST contacts Opens on Temperature Rise		<ul style="list-style-type: none"> • Temperature Preset • Adjusting Screw Lengths • Mounting Brackets



DETECT-A-FIRE® — Fire & Overheat Detection

**The world standard in
mechanical heat detectors.**

Rate-compensated heat detectors suitable for initiating alarm systems to provide precise and quick response.

Features




Hermetically Sealed, Tamper-proof, Pre-set Temperatures, Shock and Vibration Resistant



Horizontal Mount

Typical Applications

- Protection of Commercial, Industrial, and Public Facilities, Vehicle Protection




TEMPERATURE SETTINGS	CURRENT RATING	CONTACT ACTION	APPROVALS	OPTIONS
6 Fixed Settings from 140° F to 325°F	5 A @ 125VAC 0.5 A @ 125VDC	SPST Contacts open or close on temperature rise	  	<ul style="list-style-type: none"> • Mounting for exposed or concealed wiring
	1A @ 48VDC			



Vertical Mount

Typical Applications

- Protection of Commercial, Industrial and Public Facilities, Range Hoods, Paint Spray Booths, Vehicles, Hazardous or Explosive Environments, Offshore Oil Rigs, Service Stations

TEMPERATURE SETTINGS	CURRENT RATING	CONTACT ACTION	APPROVALS	OPTIONS
12 Fixed Settings from 140° F to 725°F	5.0 A @ 125VAC 0.5 A @ 125VDC 1A @ 48VDC	SPST Contacts open or close on temperature rise	  	<ul style="list-style-type: none"> • Hex or coupling head mounting • Brass or stainless steel head

For other listings and approvals, please consult factory.

 [Click Here for Quote!](#)



FENWAL CONTROLS